L-280 PLUS

L 280 PLUS is a wax ribbon designed to work on a wide range of materials, in a speed of even 12" per second providing a great quality of printing. In addition to that, you can also print on plastics used with the packing machines. This ribbon has a "backcoat" that allows to increase up to 2 million metres the long lasting of the printing head.

PHYSICAL CHARACTERISTICS

WAX **INK TYPE** TOTAL THICKNESS 8.3 µm Polyester film **SUPPORT BASE FILM THICKNESS** 4.5 µm Black COLOUR 65° C/149° F **MELTING POINT**

PRINTING CHARACTERISTICS


MATERIAL TO PRINT **PRINT SPEED USAGE CONDITIONS** STORAGE CONDITIONS

IMAGE DENSITY

2.7 (Macbeth)

Paper, synthetic paper, glossy paper Up to 12 inch/seg

5°C to 35°C, 45% to 85% relative humidity CONSIGNMENT CONDITIONS -5°C to 45°C, 20% to 85% relative humidity 5°C to 40°C, 20% to 85% relative humidity

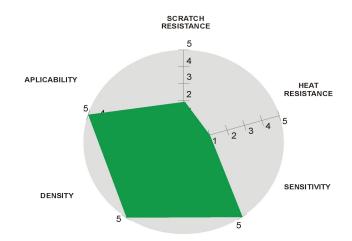



Rev. Nov-2003

IMPORTANT:: The information shown above is based upon test carried out by the producer of material and is believed to be reliable. Specifications are subject to change without notice